



"MF" SERIES • HIGH Q COILS

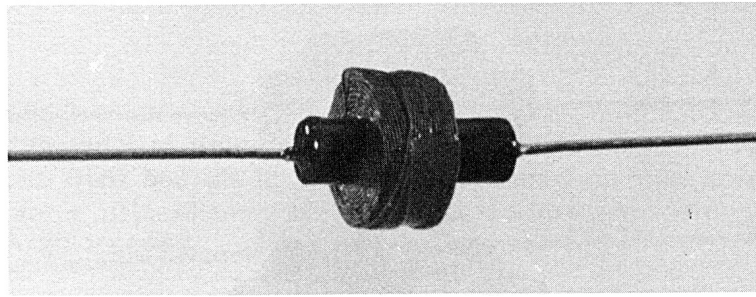

These Coils offer a unique combination of High Inductance and High Q.

| WILCO PART NO. | L ± 5% µH | Q (MIN) | TEST FREQ. MHz | S.R.F. MIN. MHz | RDC OHMS (MAX) | MA (MAX) | COIL DIA. |
|-------------------|--------------|------------|----------------------|-----------------------|----------------------|-------------|--------------|
| MF101 | 100 | 140 | .79 | 7.7 | 2 | 250 | .27 |
| MF121 | 120 | 140 | .79 | 7 | 2.2 | 250 | .27 |
| MF151 | 150 | 160 | .79 | 6.3 | 2.5 | 250 | .27 |
| MF181 | 180 | 160 | .79 | 6 | 2.9 | 250 | .28 |
| MF221 | 220 | 160 | .79 | 5.6 | 3.2 | 250 | .3 |
| MF271 | 270 | 160 | .79 | 5.1 | 3.6 | 250 | .3 |
| MF331 | 330 | 160 | .79 | 4.8 | 3.8 | 250 | .31 |
| MF391 | 390 | 160 | .79 | 4.4 | 4.2 | 225 | .33 |
| MF471 | 470 | 160 | .79 | 3.9 | 4.8 | 200 | .33 |
| MF561 | 560 | 160 | .79 | 3.6 | 5.3 | 200 | .34 |
| MF681 | 680 | 160 | .79 | 3.4 | 6 | 200 | .36 |
| MF821 | 820 | 150 | .79 | 3.1 | 6.8 | 200 | .38 |
| MF102 | 1000 | 140 | .79 | 2.6 | 7.5 | 150 | .41 |
| MF122 | 1200 | 140 | .25 | 2.2 | 7.8 | 150 | .48 |
| MF152 | 1500 | 140 | .25 | 2 | 8.8 | 150 | .52 |
| MF182 | 1800 | 140 | .25 | 1.8 | 11 | 150 | .55 |
| MF222 | 2200 | 100 | .25 | 1.5 | 12 | 150 | .38 |
| MF272 | 2700 | 100 | .25 | 1.4 | 13.5 | 125 | .41 |
| MF332 | 3300 | 100 | .25 | 1.3 | 15.1 | 125 | .44 |
| MF392 | 3900 | 95 | .25 | 1.2 | 18 | 125 | .45 |
| MF472 | 4700 | 95 | .25 | 1 | 21.5 | 100 | .47 |
| MF562 | 5600 | 95 | .25 | 1 | 25 | 80 | .5 |
| MF682 | 6800 | 95 | .25 | .9 | 29 | 80 | .53 |
| MF822 | 8200 | 70 | .25 | .91 | 30 | 80 | .48 |
| MF103 | 10000 | 65 | .25 | .85 | 34 | 80 | .52 |

Leads: 1.5 inch. AWG 20 TCW
Coils finished with Thermosetting Varnish
Forms are .187" Diameter, .625" Long.

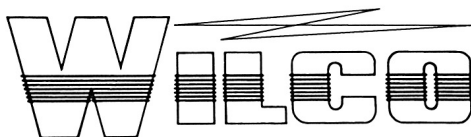

WILCO CORPORATION

6451 Saguaro Court
Indianapolis, Indiana 46268

VOICE (317) 293-9300

FAX (317) 293-9462

TOLL FREE HOTLINE (800) 611-2343