


MFB Series Miniature Ferrite Bobbin Coils

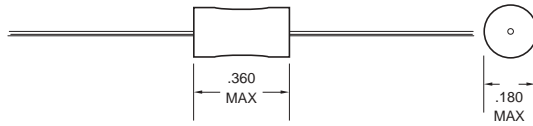

Wilco Part Number	L uh	S.R.F. Min. (MHz)	R.D.C. Ohms (Max)	Rated Current Suggested Max (ma)
MFB 10G	1	180	.08	2200
MFB 50G	5	90	.42	1400
MFB 100	10	49.5	.80	770
MFB 250	25	31.5	1.5	560
MFB 500	50	24.3	2.5	400
MFB 101	100	18	2.8	380
MFB 151	150	15.3	3.4	338
MFB 201	200	13.5	4.1	309
MFB 301	300	11.7	4.8	279
MFB 501	500	9.9	5.9	241
MFB 701	700	4	8	205
MFB 102	1000	1.8	12.3	165

L = +/- 15% @ 1KHz with zero D.C. current.
 Coils finished with thermosetting varnish.
 Standard E.I.A. color code.

FEATURES

- Leads No. 22 tinned copper 1.5" long
- Unique Ferrite configuration achieves wide range of inductances in a relatively small package.
- Options Available:
 Intermediate Values
 Tighter "L" Tolerances
 Tape and Reel

APPLICATIONS

- Switching regulators
- Switching power supplies

Wilco Corporation

6451 Saguro Ct.
 Indianapolis, IN 46268
 Hotline 800•611•2343
 Fax 317•293•9462
 www.wilcocorp.com